



# CorePro LEDbulbs

## CorePro LEDbulb ND 5.5-40W A60 E27 830

CorePro LEDbulbs are compatible with existing fixtures with an E27 or B22 holder and are designed for retrofit replacement of incandescent bulbs. They deliver huge energy savings and minimize maintenance cost. The CorePro LED bulb is the perfect bulb for your basic lighting needs. It provides the beautiful light and dependable performance you expect from LED at an affordable price.

### Product data


|                                       |                     |                                 |           |
|---------------------------------------|---------------------|---------------------------------|-----------|
| <b>General Information</b>            |                     |                                 |           |
| Cap-Base                              | E27 [ E27]          | Lamp Current (Nom)              | 55 mA     |
| Nominal Lifetime (Nom)                | 15000 h             | Wattage Equivalent              | 40 W      |
| Switching Cycle                       | 50000X              | Starting Time (Nom)             | 0.5 s     |
| Technical Type                        | 5.5-40W             | Warm Up Time To 60% Light (Nom) | 0.5 s     |
|                                       |                     | Power Factor (Nom)              | 0.5       |
|                                       |                     | Voltage (Nom)                   | 220-240 V |
| <b>Light Technical</b>                |                     |                                 |           |
| Color Code                            | 830 [ CCT of 3000K] | <b>Temperature</b>              |           |
| Beam Angle (Nom)                      | 200 °               | T-Case Maximum (Nom)            | 84 °C     |
| Luminous Flux (Nom)                   | 470 lm              |                                 |           |
| Luminous Flux (Rated) (Nom)           | 470 lm              | <b>Controls and Dimming</b>     |           |
| Color Designation                     | White (WH)          | Dimmable                        | No        |
| Correlated Color Temperature (Nom)    | 3000 K              |                                 |           |
| Luminous Efficacy (rated) (Nom)       | 85.45 lm/W          | <b>Mechanical and Housing</b>   |           |
| Color Consistency                     | <6                  | Bulb Finish                     | Frosted   |
| Color Rendering Index (Nom)           | 80                  |                                 |           |
| LLMF At End Of Nominal Lifetime (Nom) | 70 %                | <b>Approval and Application</b> |           |
| <b>Operating and Electrical</b>       |                     | Energy Saving Product           | Yes       |
| Input Frequency                       | 50 to 60 Hz         | Suitable For Accent Lighting    | No        |
| Power (Rated) (Nom)                   | 5.5 W               | Energy Efficiency Label (EEL)   | A+        |

CorePro LEDbulbs

|                               |  |
|-------------------------------|--|
| Energy Consumption kWh/1000 h | 6 kWh                                  |
| <b>Product Data</b>           |  |
| Full product code             | 871869657993000                        |
| Order product name            | CorePro LEDbulb ND 5.5-40W A60 E27 830 |
| EAN/UPC - Product             | 8718696579930                          |
| Order code                    | 929001162032                           |

|                                 |              |
|---------------------------------|--------------|
| Numerator - Quantity Per Pack   | 1            |
| Numerator - Packs per outer box | 10           |
| Material Nr. (12NC)             | 929001162032 |
| Net Weight (Piece)              | 0.076 kg     |


Dimensional drawing

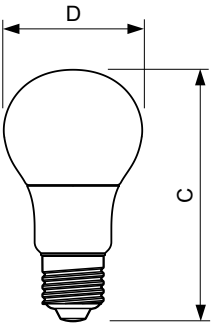


LED 6-40W E27 830

| Product                                | D     | C      |
|--|-------|--------|
| CorePro LEDbulb ND 5.5-40W A60 E27 830 | 60 mm | 110 mm |

Photometric data

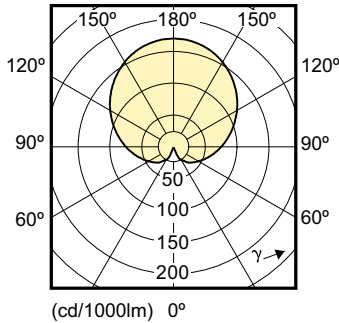

6-40W A60 E27 /830

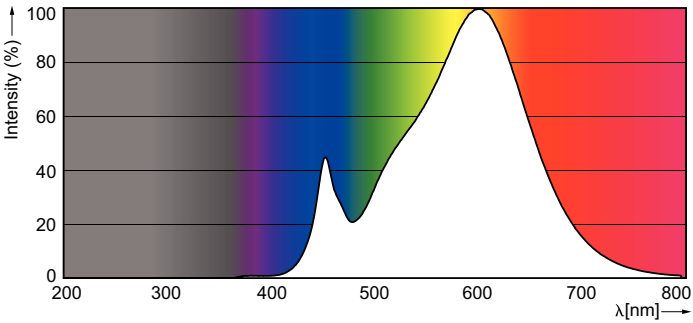

A60 /830 FR

